
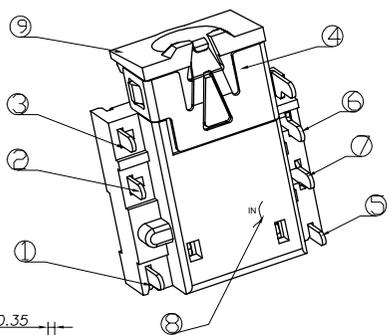
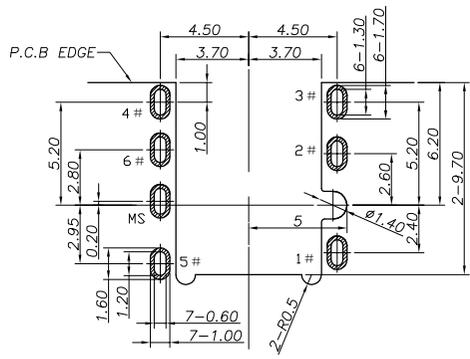
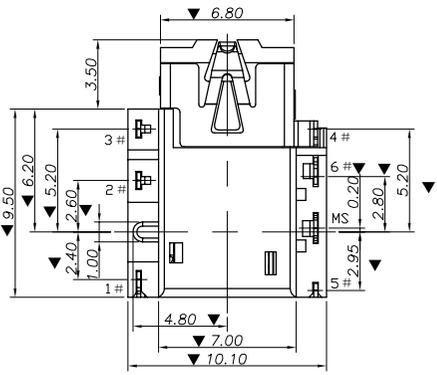





RoHS Compliant HF

REV.	ECN.NO	MODIFY.CONTENT
A		初版发行
B	N23053110	更新包装规范

DATE CODE:
 YY MM DD
 CONNECTER YEAR WEEK

DATE CODE


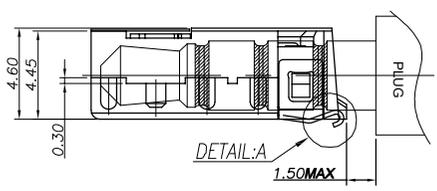


- 备注:
- 电气性能:
 - 接触阻抗: 30m Ω 最大(初始), 50m Ω 最大(测试后)
 - 耐压测试: 500V AC 一分钟.
 - 绝缘阻抗: 100M Ω 最小. 测试电压500V直流
 - 机械性能:
 - 公头插入力: 0.5~3.0kgf.
 - 公头拔出力: 0.5~3.0kgf.
 - 寿命测试: 5,000次.
 - 用于回流焊无铅工艺
 - 抗回流焊接温度 260°C.
 - 使用公头应符合协会规范 EIAJ RC-5325 SPEC.
 - 包装方式: 载带卷盘.
 - 产品需符合无铅和无卤要求.
 - 重点尺寸: ▼

PART.NO.:
AJ021-BM401-**-08

- 08: 功能区镀金1U", 焊脚镀G/F
- 09: 功能区镀金3U", 焊脚镀G/F
- 10: 功能区镀金5U", 焊脚镀G/F
- 11: 功能区镀金10U", 焊脚镀G/F
- 12: 功能区镀金15U", 焊脚镀G/F
- 13: 功能区镀金30U", 焊脚镀G/F

RECOMMENDED PLUG
 Ø3.5 4-POLE STANDARD PLUG

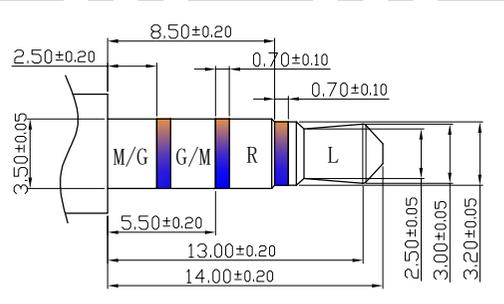

1	1# TERMINAL	1	C5210 T=0.20	GOLD(SEE P/N) ON CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER 30u" Ni	
2	2# TERMINAL	1	C5210 T=0.20		
3	3# TERMINAL	1	C5210 T=0.20		
4	4# TERMINAL	1	C5210 T=0.20		
5	5# TERMINAL	1	C5210 T=0.20		
6	6# TERMINAL	1	C5210 T=0.20		
7	MS SHELL	1	SUS 304 T=0.20	Ni 50u" MIN.	
8	SEPARATOR	1	PA9T UL-94V-0		BLACK
9	HOUSING	1	PA9T UL-94V-0		BLACK
10	MYLAR	1	10*5*0.1		
NO.	PART NAME	Q'TY	MATERIAL	FINISH	REMARK

X.± 0.20	X° ± 5°	UNITS	mm
.X± 0.15	.X° ± 2°	MAT'L	
.XX± 0.08	.XX° ± 1°	FINISH	
.XXX± 0.05	.XXX° ± 0.5°		Q'TY

NAME(INTENDED USE)	oln® 东莞市欧联电子科技有限公司 DONGGUAN OLN ELECTRONICS TECHNOLOGY CO., LTD.		
PART NO.(INTENDED USE)	TITLE: Ø3.5mm AUDIO JACK CONN(AJ021)		
APPD:	DWG NO.: AJ021-BM401-00		
CHKD:			
DR: Amin 2023-05-31		SCALE	SHEET
	1:1	1/2	REV. B

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF OLN ELECTRONICS TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF OLN ELECTRONICS TECHNOLOGY CO., LTD.