


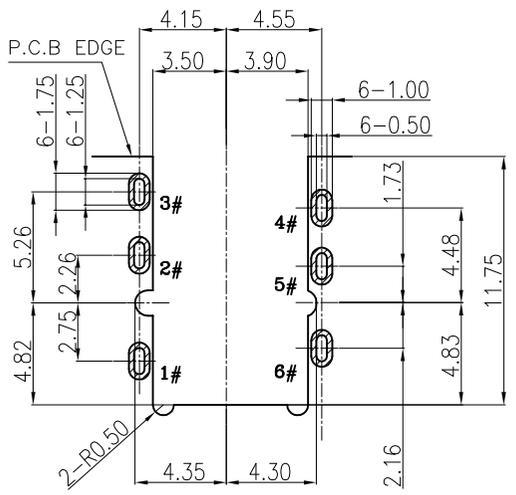

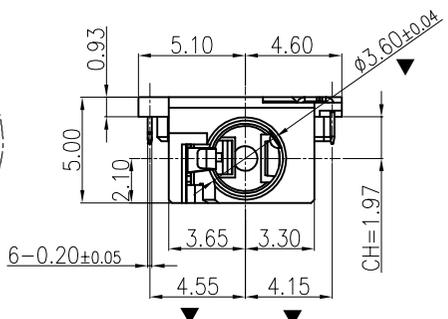


REV.	ECN.NO	MODIFY.CONTENT
X1		初版发行
A		转正式版发行

备注:



- 电气性能:
  - 1-1. 接触阻抗: 50m Ω 最大(初始), 100m Ω 最大(测试后)
  - 1-2. 耐压测试: 500V AC 一分钟.
  - 1-3. 绝缘阻抗: 100M Ω 最小. 测试电压500V直流
- 机械性能:
  - 2-1. 公头插入力: 0.8~3.0kgf 寿命后: 2.5kgf MAX.
  - 2-2. 公头拔出力: 0.6~1.8kgf 寿命后: 0.5kgf MIN.
- 寿命测试: 5,000次.
- 包装方式: 载带卷盘.
- 产品需符合无铅和无卤要求.
- "▲"重点管控尺寸符号.

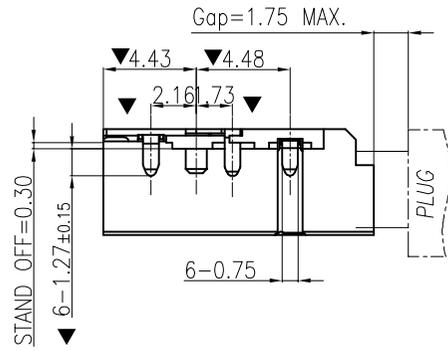

PART. NO:  
AJ186-BM401-\*\*

- 08: 功能区镀金1U", 锡脚镀G/F
- 09: 功能区镀金3U", 锡脚镀G/F
- 10: 功能区镀金5U", 锡脚镀G/F
- 11: 功能区镀金10U", 锡脚镀G/F
- 12: 功能区镀金15U", 锡脚镀G/F
- 13: 功能区镀金30U", 锡脚镀G/F

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
H	Separator	1	LCPE130I UL94V-0	Black
G	Shunt terminal	1	C5210-EH 0.20t	Gold Flash On Contact And Solder Tail Area, Nickel Under Plated
F	Transfer Spring	1	C5210-EH 0.20t	
E	Tip spring	1	SUS304-1/2H, 0.2t	
D	Ring -A	1	C5210-EH 0.20t	Gold Flash On Contact And Solder Tail Area, Nickel Under Plated
C	Ring-B	1	C5210-EH 0.20t	
B	Earth spring	1	C5210-EH 0.20t	
A	Housing	1	PA9T+45%GF UL94V-0	Black

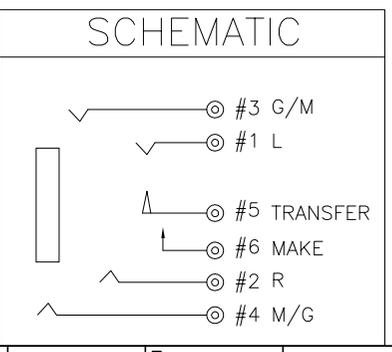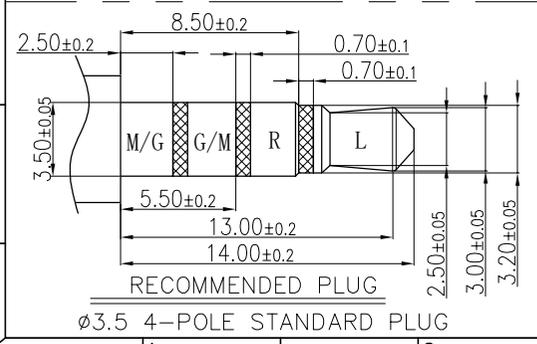

X.±0.20	X°.± 5°	UNITS	UNITS
.X±0.15	.X°± 2°	MAT'L	
.XX±0.08	.XX°± 1°	FINISH	
.XXX±0.05	.XXX°± 0.5°	Q'TY	

NAME(INTENDED USE)	φ3.5mm AUDIO JACK CONN
PART NO.(INTENDED USE)	AJ186-BM401-**
APPD:	
CHKD:	
DR: Amin 2023-03-02	

**oln** 东莞市欧联电子科技有限公司  
DONGGUAN OLN ELECTRONICS TECHNOLOGY CO., LTD.

TITLE: SINGLE AUDIO JACK 4 POLE  
CH=-1.97mm

DWG NO.: AJ186-BM401-00

SCALE	SHEET	REV.
1:1	1/2	A

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF OLN ELECTRONICS TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF OLN ELECTRONICS TECHNOLOGY CO., LTD.