

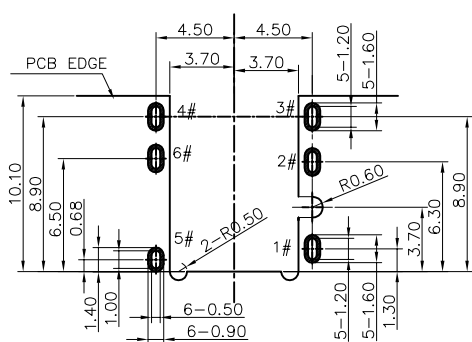
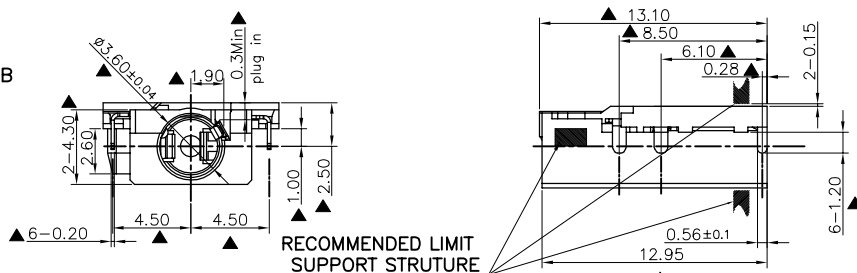
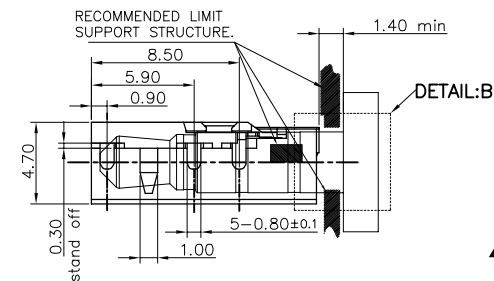
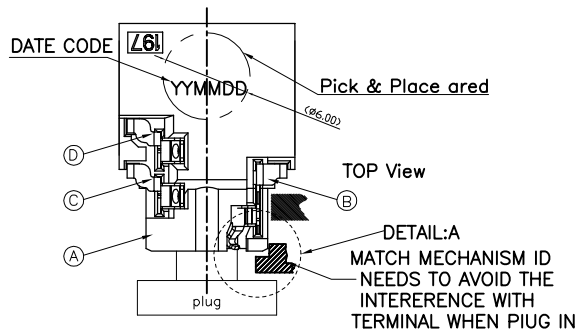



RoHS
Compliant

HF




PCB LAYOUT TOP VIEW

(Tolerance:±0.05)

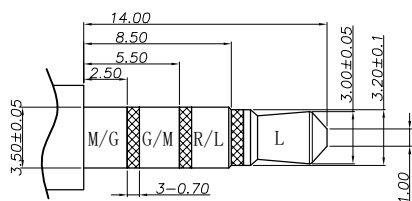

RECOMMENDED PLUG
ø3.5 4-POLEPLUG(TOL±0.05)



X.± 0.20	X°± 5°	UNITS mm
.X± 0.15	.X°± 2°	MAT'L
.XX± 0.08	.XX°± 1°	FINISH
.XXX± 0.05	.XXX°± 0.5°	Q'TY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF OLN ELECTRONICS TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF OLN ELECTRONICS TECHNOLOGY CO., LTD.		

PART. NO. :

AJ197-BM401-**-

备注:

1. 电气性能:

1-1. 接触阻抗: 50m Ω 最大(初始),
100m Ω 最大(测试后)

1-2. 耐压测试: 500V AC 一分钟.

1-3. 绝缘阻抗: 100M Ω 最小.
测试电压500V 直流

2. 机械性能:

2-1. 公头插入力: 0.3~3.0kgf

2000寿命后: 0.3~3.0kgf

2-2. 公头拔出力: 0.3~3.0kgf.

2000寿命后: 0.3~3.0kgf

3. 寿命测试: 3,000次.

4. 用于回流焊无铅工艺

5. 抗回流焊焊接温度 260°C.

6. 使用公头应符合协会规范
EIAJ RC-5325 SPEC.

7. 包装方式: 载带卷盘.

8. 产品需符合无铅和无卤要求.

9. ▲为重点尺寸

08: 功能区镀金1U", 锡脚镀Gold flash

09: 功能区镀金3U", 锡脚镀Gold flash

10: 功能区镀金5U", 锡脚镀Gold flash

11: 功能区镀金10U", 锡脚镀Gold flash

12: 功能区镀金15U", 锡脚镀Gold flash

13: 功能区镀金30U", 锡脚镀Gold flash

H	SEPARATOR	1	LCP+30%GF UL 94V-0	BLACK
G	5#-TERMINAL	1	C5210 T=0.2mm	Au1-3u" ON THE CONTACTAREA Au1-3u" ON THE SOLDER AREA/ALLOW 50u" NL
F	6#-TERMINAL	1	C5210 T=0.2mm	
E	1#-TERMINAL	1	C5210 T=0.2mm	
D	2#-TERMINAL	1	C5210 T=0.2mm	
C	3#-TERMINAL	1	C5210 T=0.2mm	
B	4#-TERMINAL	1	C5210 T=0.2mm	
A	HOUSING	1	PA4T UL 94V-0	BLACK
NO.	PART NAME	QTY	MATERIAL	REMARK

NAME(INTENDED USE)	NAME(INTENDED USE)		
PART NO.(INTENDED USE)	PART NO.(INTENDED USE)		
APPD:	APPD:		
CHKD:	CHKD:		
DR: Amin 2024-01-09	DR: Amin 2024-01-09		
TITLE:		TITLE:	
DWG NO.:		DWG NO.:	
SCALE		SCALE	
SHEET		SHEET	
REV.		REV.	