





NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
G	FIXED-B	1	SUS304 0.35T	
F	FIXED-A	1	SUS304 0.35T	Matt Tin plating All Over 120u"Min
E	LATCH-B	1	SUS304 0.35T	Clear
D	LATCH-A	1	SUS304 0.35T	Clear
C	TERMINAL-B	131	C5210 0.15T	Contact area gold plating Solder
B	TERMINAL-A	131	C5210 0.15T	TAIL G/F Ni 50u"Min Underplate
A	HOUSING	1	LCP,UL94V-0	BLACK.

GENERAL	TOLERANCE	DWG.NO.	DDR004-SS401-08	PART.NO.	DDR004-SS401-**	DRAWN	DU 2023-06-14	UNIT	mm	SCALE	ND SCALE
---------	-----------	---------	-----------------	----------	-----------------	-------	---------------	------	----	-------	----------

REV.	ECH.N.O.	MODIFY CONTENT
A		NEW
B	N23060601	CHANGE LATCH AND FIXED



REV.	SIZE	REV.	SIZE	SHEET	1	DF	4	APPROVED
X.±0.50	X.±5°	X.±0.25	X.±2°		1	DF	4	
.xx±0.15	.xx±1°							

REV.	ECH.N.O.	MODIFY CONTENT
A		NEW
B	N23060601	CHANGE LATCH AND FIXED

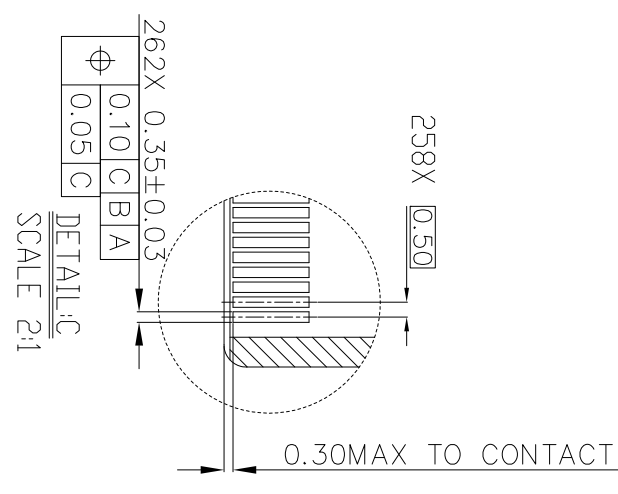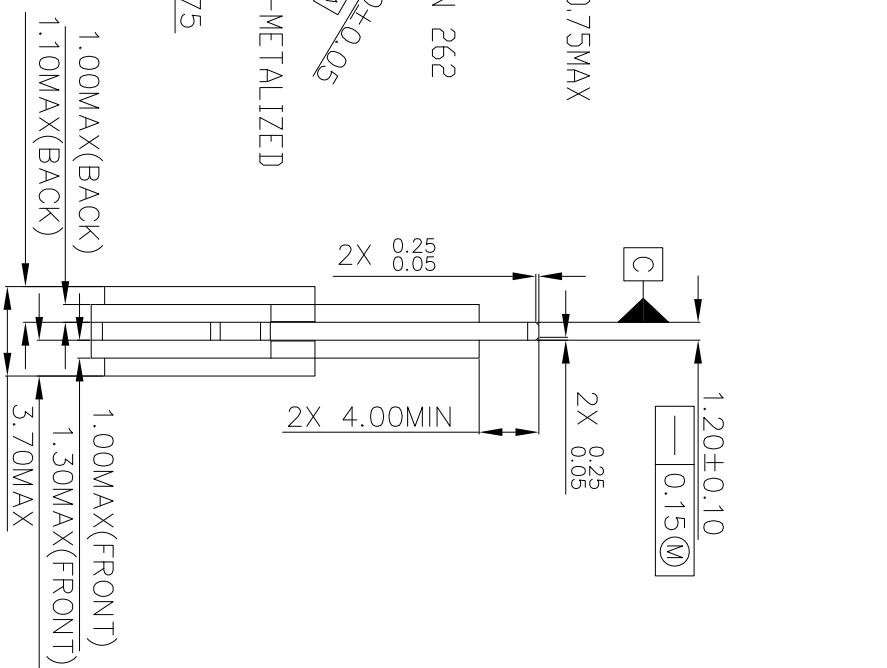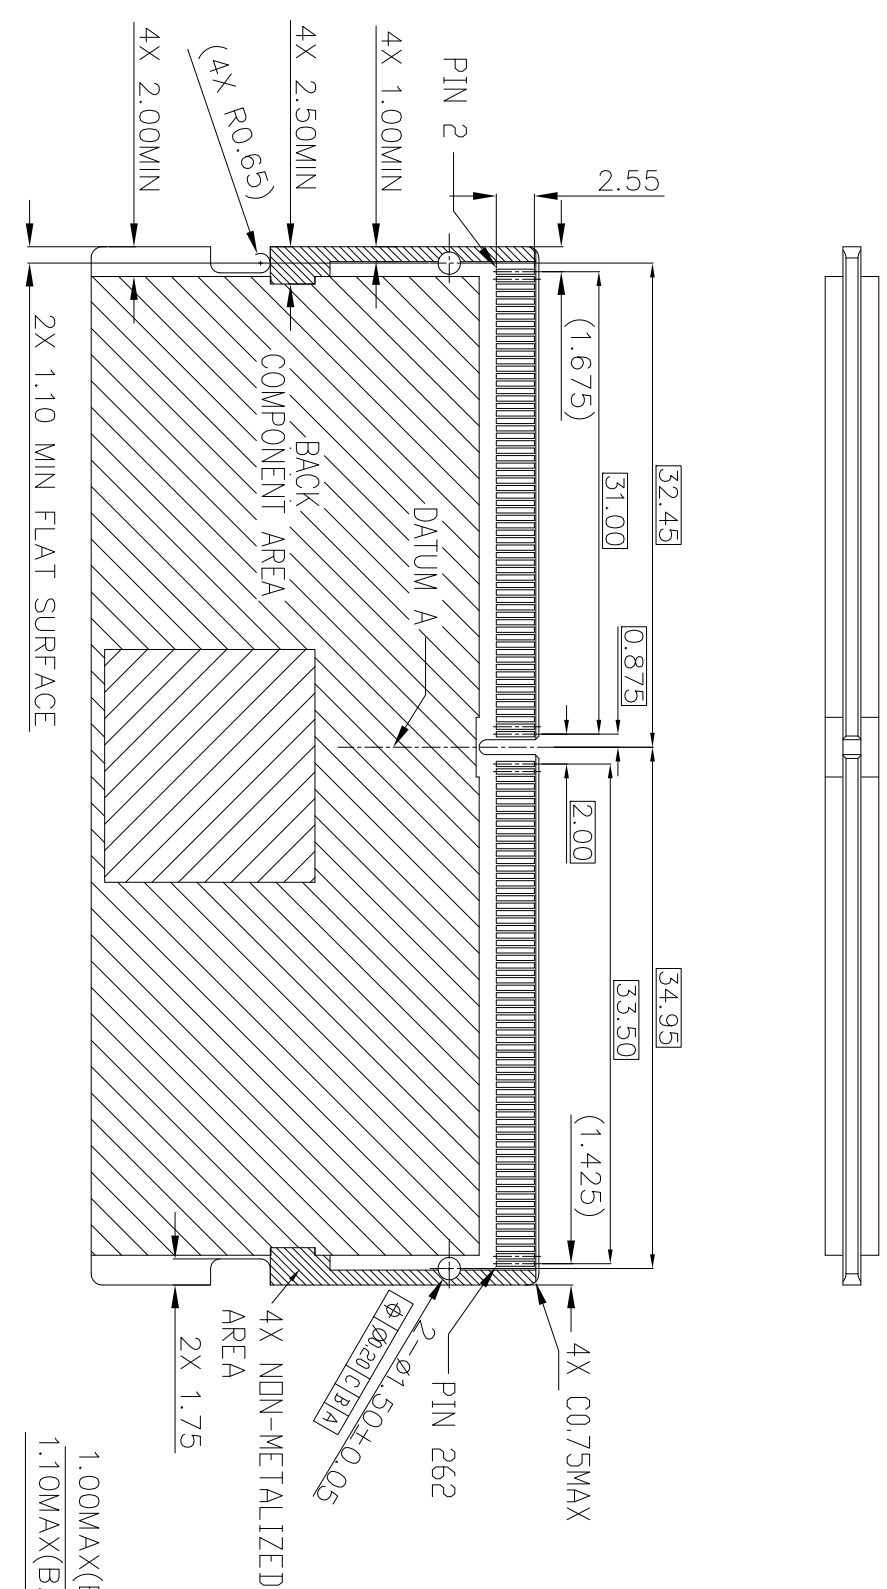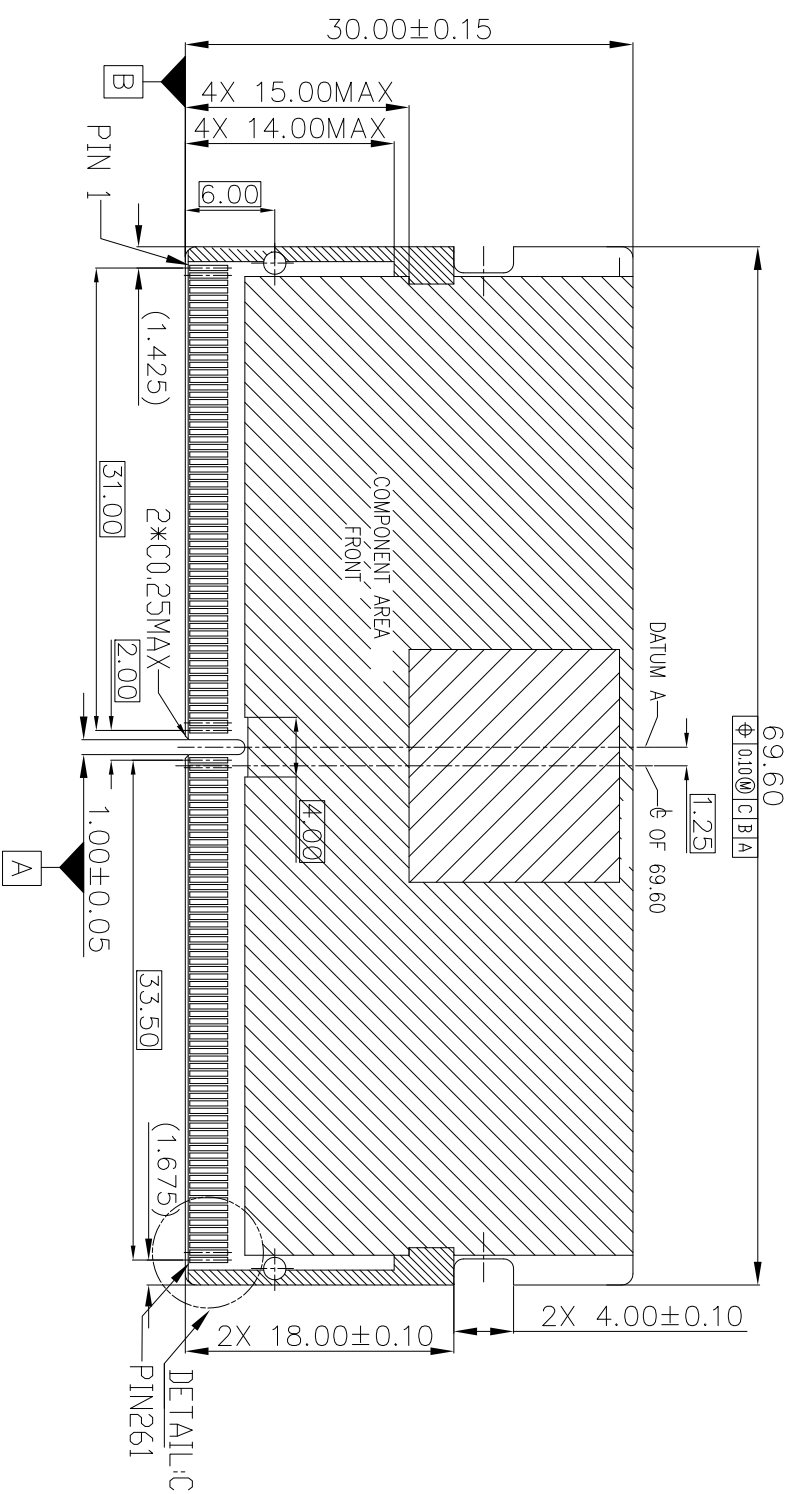

NOTES:
1.DIMENSIONING AND TOLERANCING PER ASME Y14.5-2009.
2. TOLERANCES ON ALL DIMENSIONS 0.15 UNLESS OTHERWISE SPECIFIED.
3.ALL DIMENSIONS ARE MM.
4.RECOMMENDED PLATING FOR CONTACT PADS ARE:
1) VARIATION xxAX: GOLD PLATING 0.76 MICROMETERS MINIMUM OVER 2.00 MICROMETERS MINIMUM NICKEL.
2) VARIATION xxBX: GOLD PLATING 0.05 MICROMETERS MINIMUM OVER 0.25 MICROMETERS MINIMUM PALLADIUM OVER 2.00 MICROMETERS MINIMUM NICKEL
3) VARIATION xxCX: GOLD PLATING 0.05 MICROMETERS MINIMUM OVER 2.00 MICROMETERS MINIMUM NICKEL.
MODULE PLATING RECOMMENDATIONS TESTED PER INDUSTRY STANDARD EIA 364-1000. RELIABILITY TESTING REQUIRES TEST MODULE,CONNECTOR, AND IDENTIFICATION OF TEST CONDITIONS.

GENERAL TOLERANCE	DWG.NO.	DDR004-SS401-08	PART.NO.	DDR004-SS401-*	DRAWN	DU 2023-06-14	UNIT	mm	SCALE	ND SCALE
X.±0.50	REV.		TITLE	DDR5 S0 DIMM 262Pin(STD) H5.20	CHECKED					
.X.±0.25	SIZE	A4	SHEET	2 OF 4	APPROVED					
.XX±0.15										

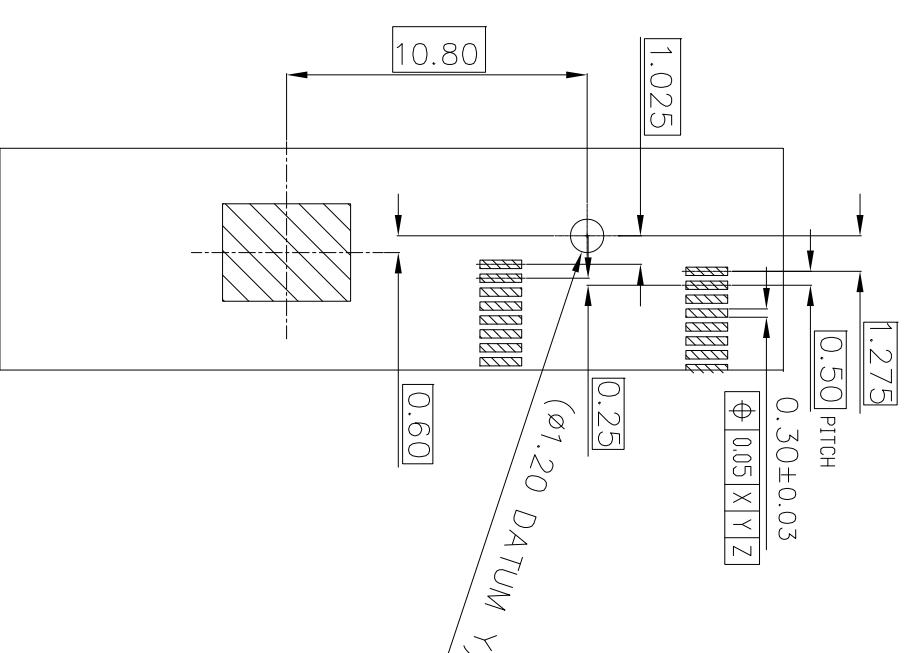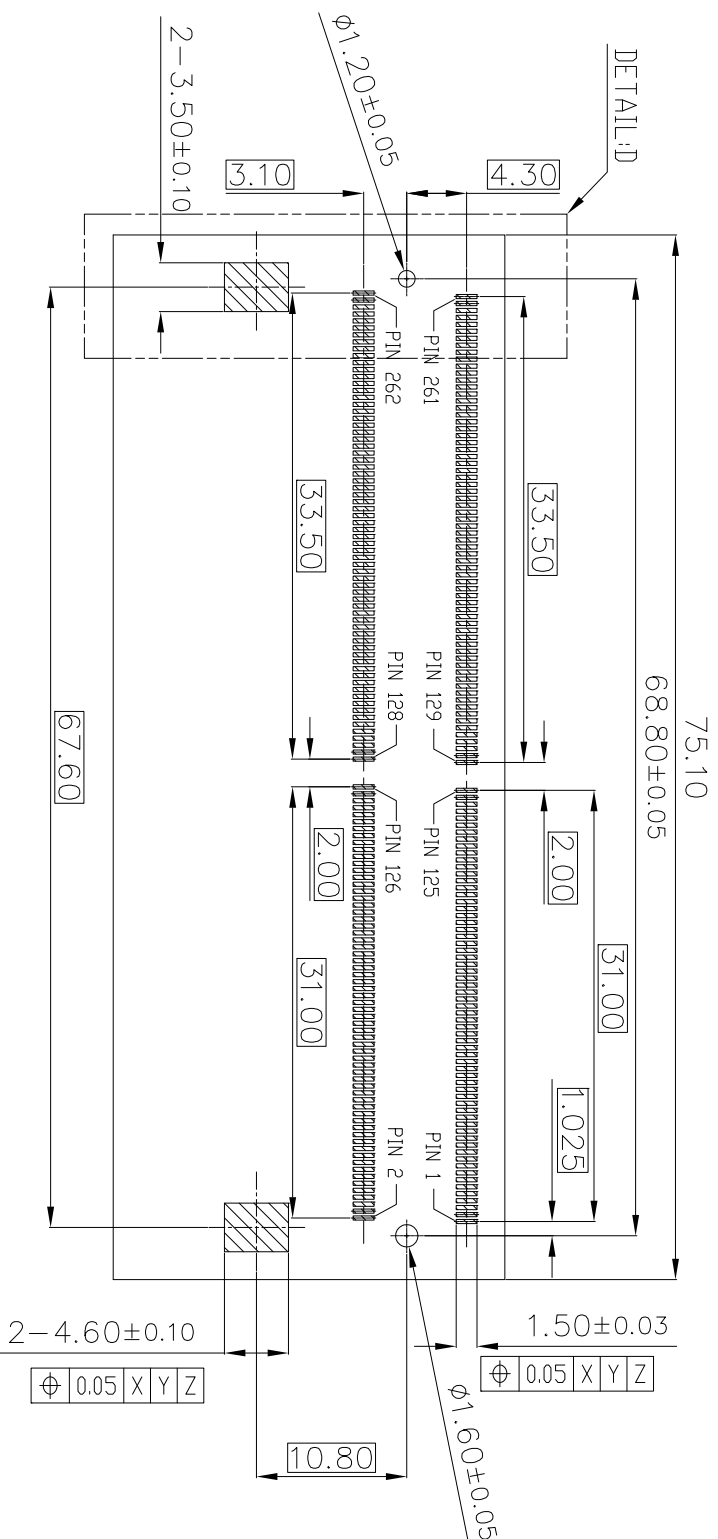

DETAIL: D
SCALE 2:1


RECOMMEND PCB LAYOUT

THE TOLERANCE UNLESS SPECIFIED IS ±0.05 MM





 Solder pad area

GENERAL	TOLERANCE	DWG.NO.	DDR004-SS401-08	PART.NO.	DDR004-SS401-**	DRAWN	DU 2023-06-14	UNIT	mm	SCALE	ND SCALE
---------	-----------	---------	-----------------	----------	-----------------	-------	---------------	------	----	-------	----------

X.±0.50	X.°± 5°	REV.	A4	TITLE	DDR5 S0 DIMM 262Pin(STD) H5.20	CHECKED		 东莞市欧联电子科技有限公司 DONGGUAN OLN ELECTRONICS TECHNOLOGY CO., LTD.
.X±0.25	.X°± 2°	SIZE	A4	SHEET	3 OF 4	APPROVED		
.XX±0.15	.XX± 1°							



REV.	ECN.NO.	MODIFY CONTENT
A		NEW
B	N23060601	CHANGE LATCH AND FIXED

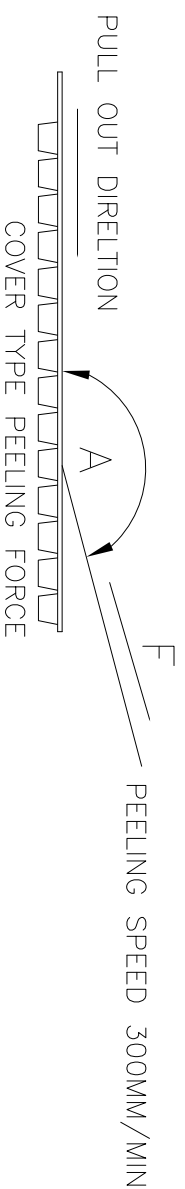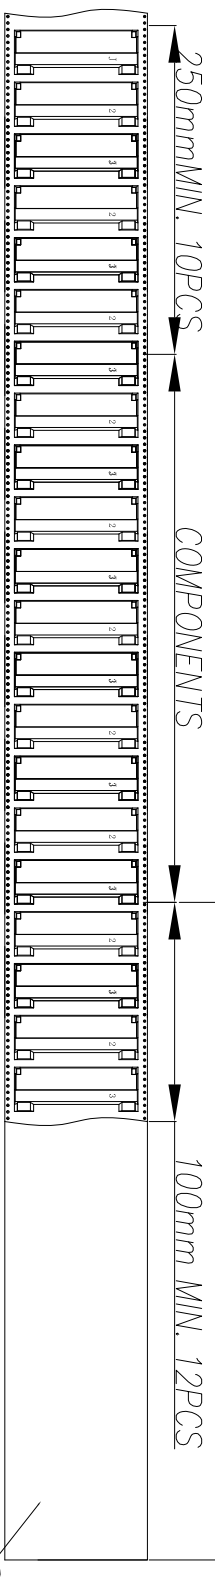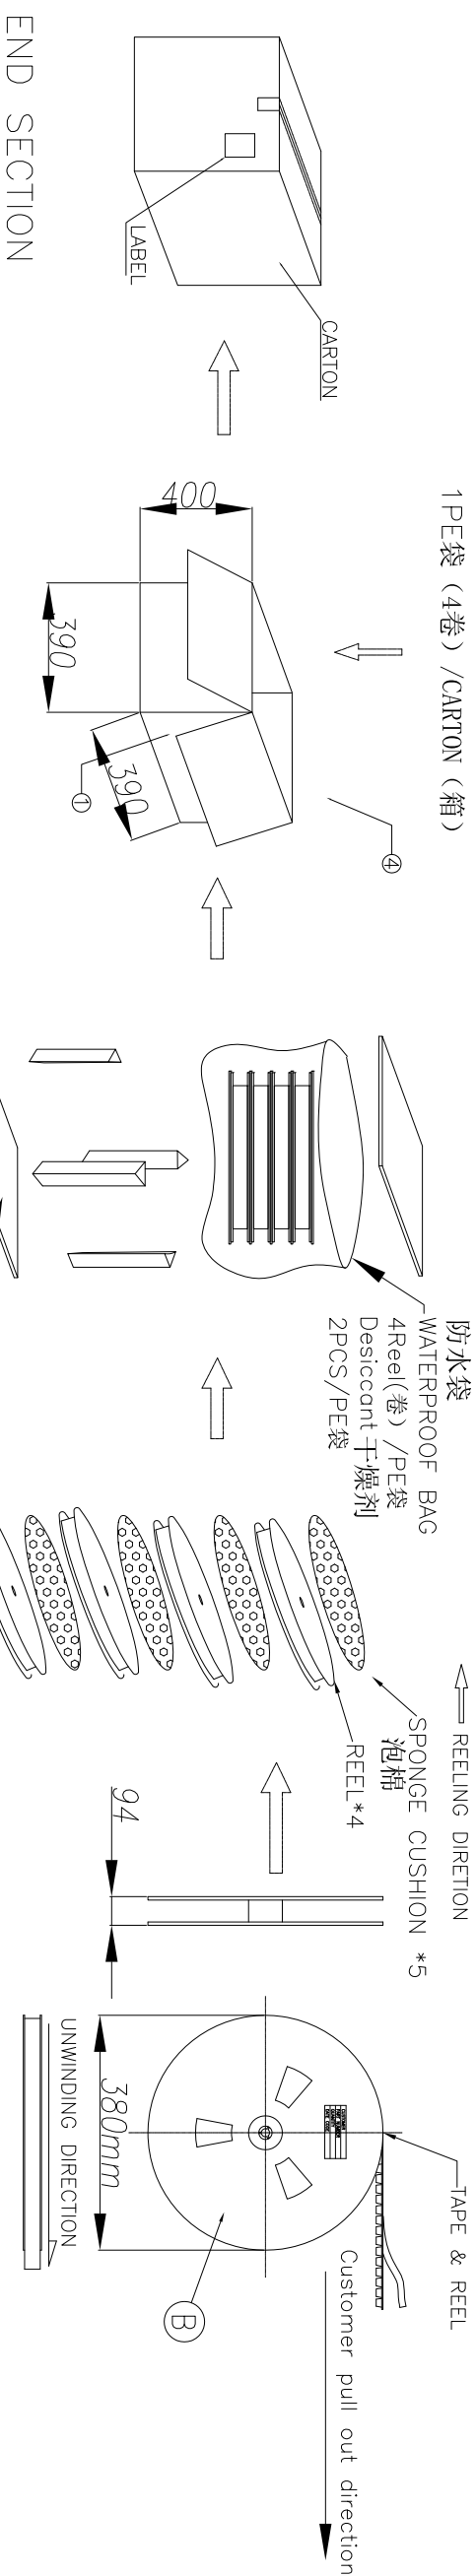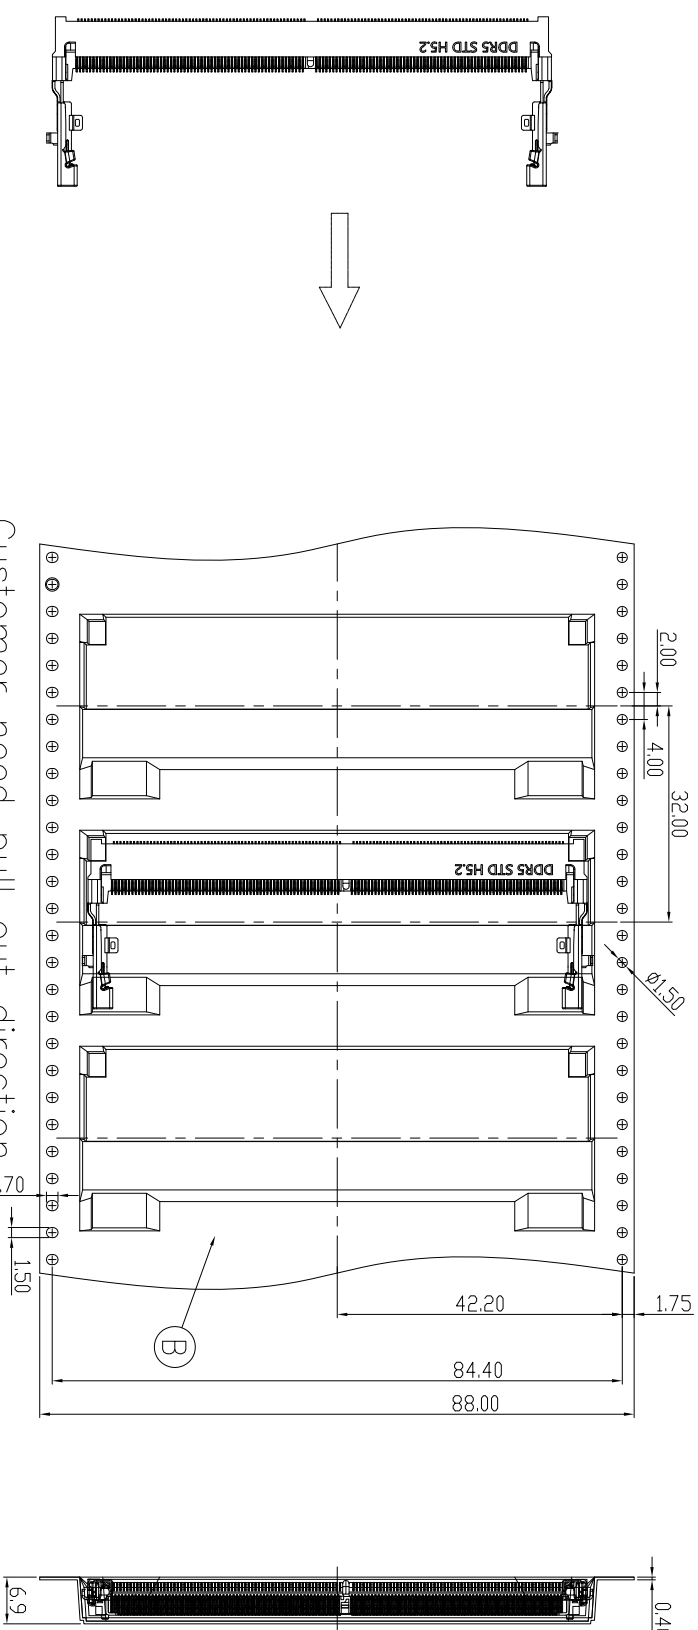

A	165°-180°
F	0.1N-1.3N

NOTES:

- Quantity: 400PCS/Reel
- 4 Reel/Carton: 1600 PCS/Carton
- Each plate needs vacuum packaging, and 2PCS desiccant is placed in the packaging bag

ITEM	MATERIAL	Q'TY	NOTE
⑤	WATERPROOF BAG	1	
④	SUPPORT BRACE	4	
③	REEL ASS'Y	4	
②	CARRIER TAPE	4	
①	CARTON	1	

GENERAL TOLERANCE DWG.NO. DDR004-SS401-08

PART.NO. DDR004-SS401-**

DRAWN DU 2023-06-14

UNIT mm

SCALE ND SCALE

X.±0.50 REV. X.±5°

TITLE DDR5 SO DIMM 262Pin(STD) H5.20

CHECKED

UNIT

.X±0.25 REV. .X±2°

SHEET

4 DF 4

APPROVED

.XX±0.15 REV. .XX±1°

SHEET

4 DF 4

APPROVED

OLN 东莞市欧联电子科技有限公司
DONGGUAN OLN ELECTRONICS TECHNOLOGY CO., LTD.