
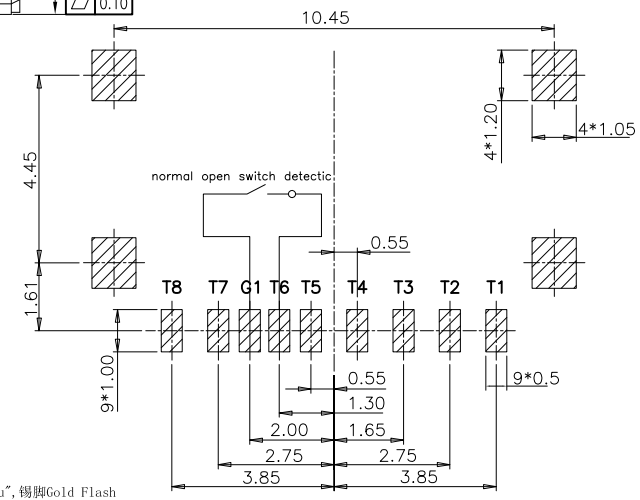
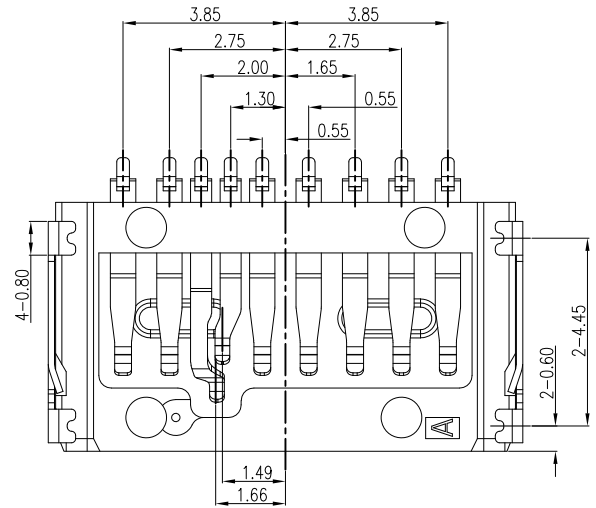
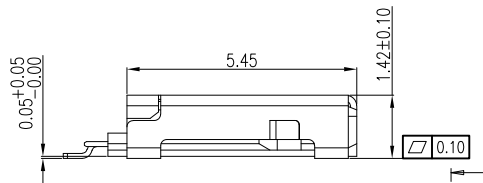


- NOTES :
- MATERIAL :
    - HOUSING:LCP UL94 V-0, BLACK COLOR.
    - SHELL: STAINLESS STEEL
    - CONTACT: COPPER ALLOY
  - FINISH :
    - CONTACT: GOLD PLATING ON CONTACT AREA, AU 1u"MIN ON SOLDERTAIL AREA. 50u" MIN NICKEL PLATING OVERALL.
    - SHELL: 30u" MIN NICKEL PLATING OVERALL. Au 1u"MIN ON SOLDERTAIL AREA.
  - ELECTRICAL CHARACTERISTICS:
    - OPERATING VOLTAGE : 100V AC(rms)/DC.
    - CURRENT RATING : 0.5 A.
    - OPERATING TEMPERATURE: -25°C~+70°C.
    - CONTACT RESISTANCE: 100 m OHMS MAX.
    - INSULATION RESISTANCE: 1000M OHMS MIN. AT 250VDC.
    - DIELECTRIC WITHSTANDING VOLTAGE:500 VAC/1MINUTE.

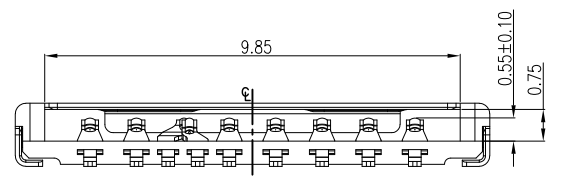

PART.NO.: MR267-AN401\*\*

08: 功能区镀金1u", 锡脚Gold Flash  
 09: 功能区镀金3u", 锡脚Gold Flash  
 10: 功能区镀金5u", 锡脚Gold Flash  
 11: 功能区镀金15u", 锡脚Gold Flash  
 12: 功能区镀金30u", 锡脚Gold Flash

T-CARD PIN NO.	PIN NO.
T1	DAT2
T2	CD/DAT3
T3	CMD
T4	VDD
T5	CLK
T6	VSS
T7	DAT0
T8	DAT1
G1	SWITCH

GENERAL TOLERANCE		DWG.NO.	MR267-AN401-00	PART.NO.	MR267-AN401-**	DRAWN	Toff 2021.08.28	UNIT	mm	SCALE	1:1
x.±0.50	x.*± 5°	REV.	X1	TITLE	Micro SD No Push H1.42	CHECKED		东莞市欧联电子科技有限公司 DONGGUAN OLN ELECTRONICS TECHNOLOGY CO., LTD.			
.x±0.25	.x*± 2°	SIZE	A4	SHEET	1 OF 2	APPROVED					
.xx±0.15	.xx± 1°										