


REV.	ECN.ND.	MODIFY.CONTENT
A	/	NEW

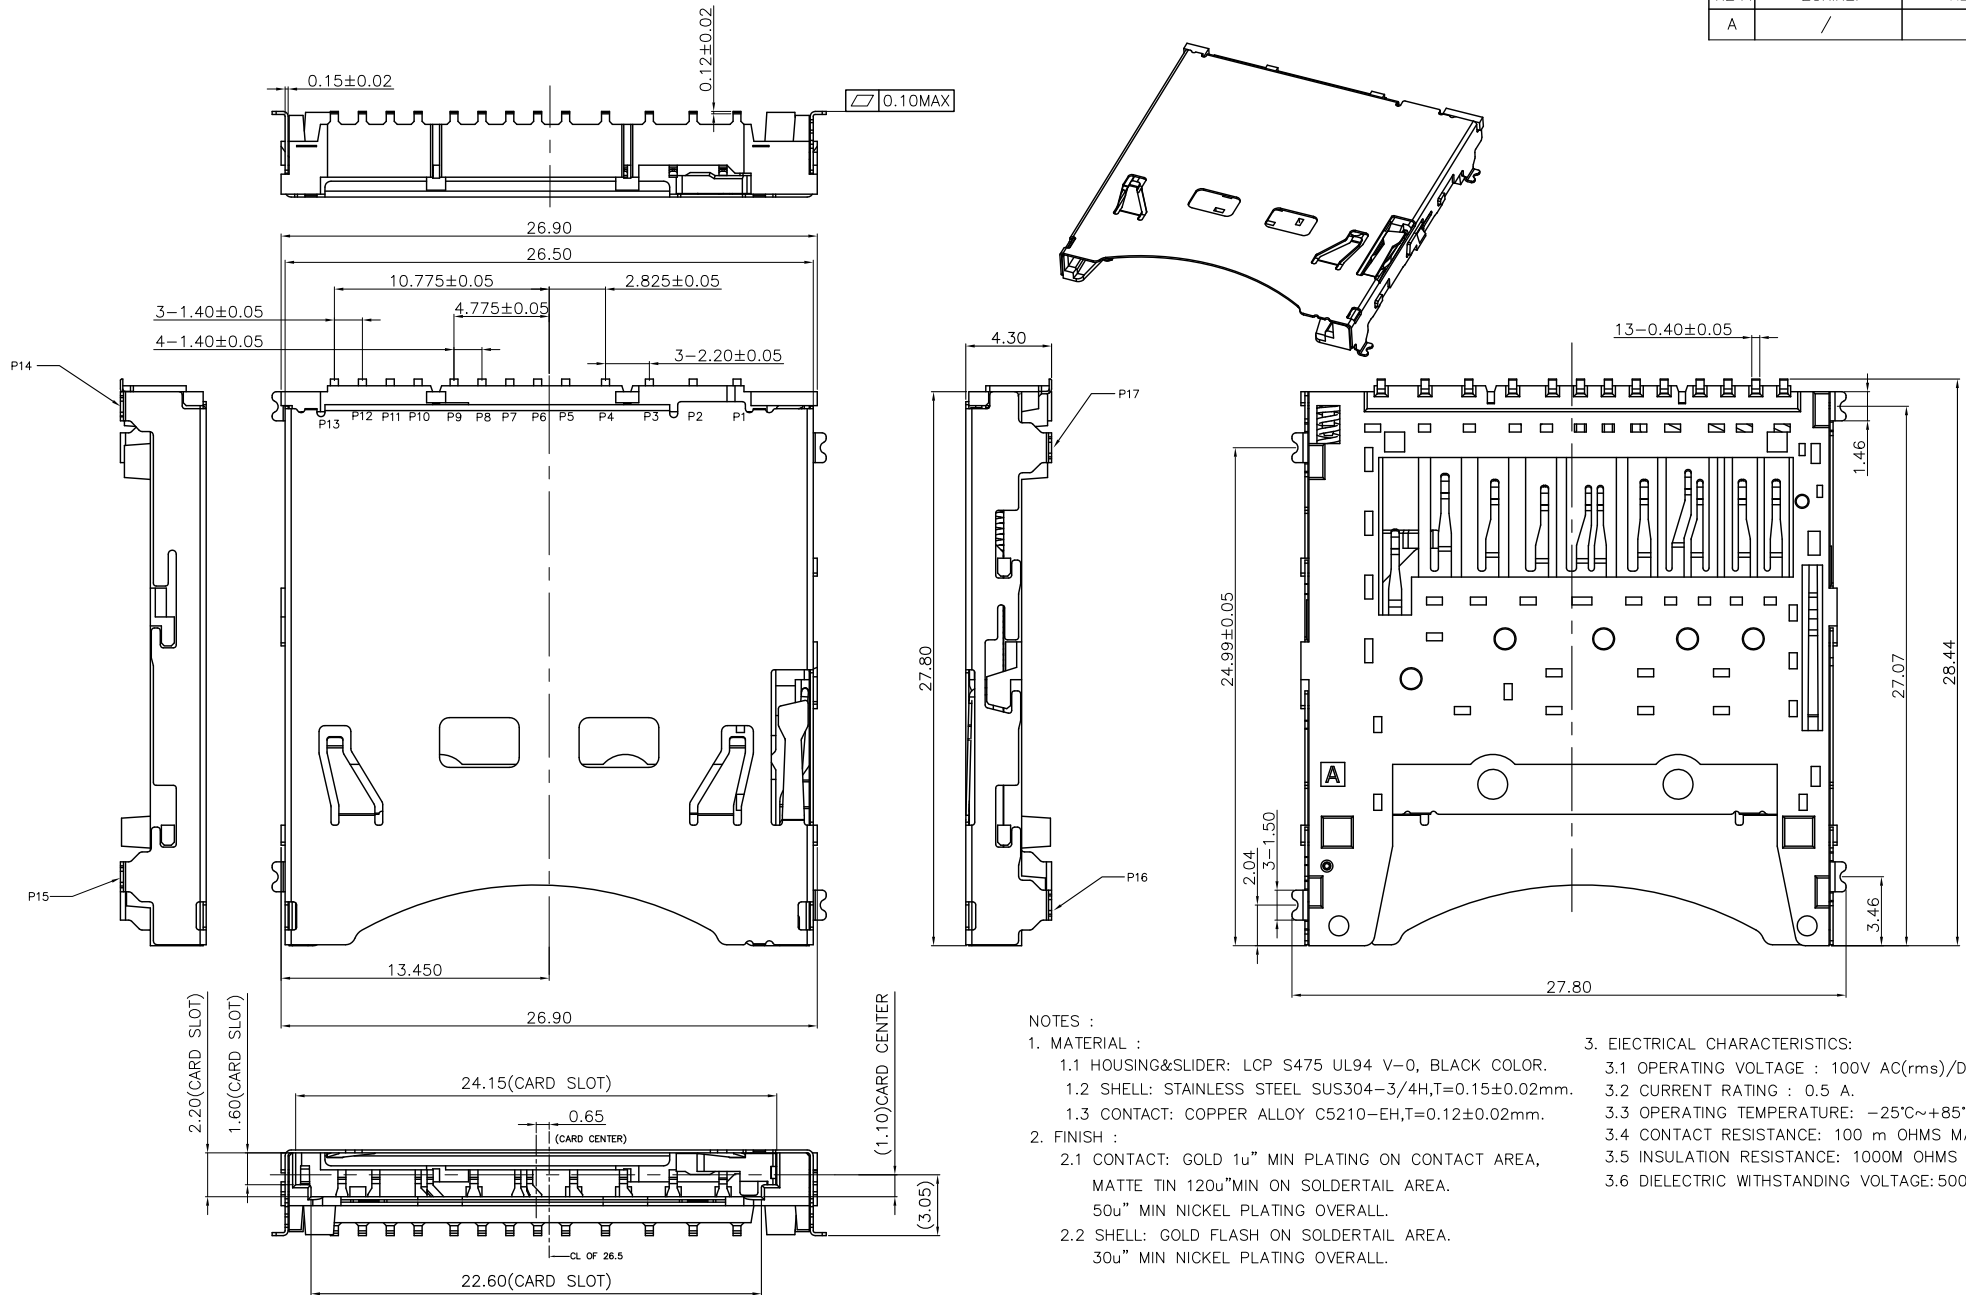

NOTES :

1. MATERIAL :

- 1.1 HOUSING&SLIDER: LCP S475 UL94 V-0, BLACK COLOR.
- 1.2 SHELL: STAINLESS STEEL SUS304-3/4H,T=0.15±0.02mm.
- 1.3 CONTACT: COPPER ALLOY C5210-EH,T=0.12±0.02mm.

2. FINISH :

- 2.1 CONTACT: GOLD 1u" MIN PLATING ON CONTACT AREA, MATTE TIN 120u"MIN ON SOLDER TAIL AREA. 50u" MIN NICKEL PLATING OVERALL.
- 2.2 SHELL: GOLD FLASH ON SOLDER TAIL AREA. 30u" MIN NICKEL PLATING OVERALL.

3. ELECTRICAL CHARACTERISTICS:

- 3.1 OPERATING VOLTAGE : 100V AC(rms)/DC.
- 3.2 CURRENT RATING : 0.5 A.
- 3.3 OPERATING TEMPERATURE: -25°C~+85°C.
- 3.4 CONTACT RESISTANCE: 100 m OHMS MAX.
- 3.5 INSULATION RESISTANCE: 1000M OHMS MIN. AT 250VDC.
- 3.6 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/1MINUTE.

GENERAL TOLERANCE	TOLERANCE	DWG.ND.	TW191-AP401-00	PART.ND.	TW191-AP401-**	DRAWN	L.M.J 2019.05.07	UNIT	mm	SCALE	1:1
x.±0.50	x. °±5 °	REV.	A	TITLE	SD Push H4.30 Conn.	CHECKED		东莞市欧联电子科技有限公司 DONGGUAN OLN ELECTRONICS TECHNOLOGY CO., LTD.			
.x±0.25	.x °±2 °	SIZE	A4	SHEET	1 OF 3	APPROVED					
.xx±0.15	.xx ±1 °	A4									