


- NOTES :
- MATERIAL :
    - HOUSING:LCP UL94 S475 V-0, BLACK COLOR.
    - SHELL:STAINLESS STEEL SUS304.
    - CONTACT: COPPER ALLOY C5210.
  - FINISH :
    - CONTACT: Au(SEE PART NUMBER)ON CONTACT AREA, MATTE TIN 100u"MIN ON SOLDER TAIL AREA. 50u" MIN NICKEL PLATING OVERALL.
    - SHELL: 30u" MIN NICKEL PLATING OVERALL. Au 1u" MIN ON SOLDER TAIL AREA.
  - ELECTRICAL CHARACTERISTICS:
    - OPERATING VOLTAGE : 100V AC(rms)/DC.
    - CURRENT RATING : 0.5 A.
    - OPERATING TEMPERATURE: -25°C~+85°C.
    - CONTACT RESISTANCE: 100 m OHMS MAX.
    - INSULATION RESISTANCE: 1000M OHMS MIN. AT 250VDC.
    - DIELECTRIC WITHSTANDING VOLTAGE:500 VAC/1MINUTE.

PART.NO.: TW76-AP401-\*\*

- 42: 功能区镀金1U", 锡脚镀雾纯锡至少100U"
- 43: 功能区镀金3U", 锡脚镀雾纯锡至少100U"
- 44: 功能区镀金5U", 锡脚镀雾纯锡至少100U"
- 45: 功能区镀金10U", 锡脚镀雾纯锡至少100U"
- 46: 功能区镀金15U", 锡脚镀雾纯锡至少100U"
- 47: 功能区镀金30U", 锡脚镀雾纯锡至少100U"

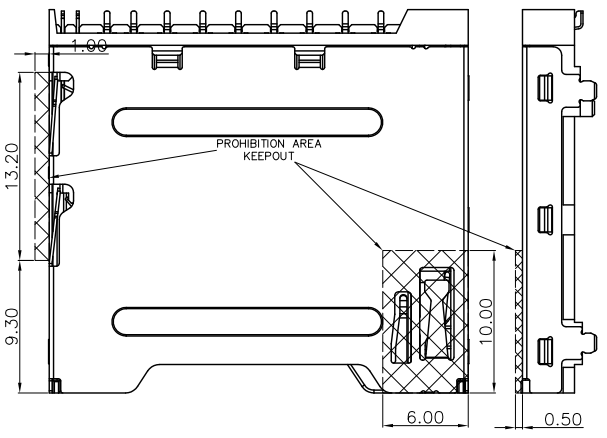

Pin Define

Pin No.	NAME	Pin No.	NAME
1	CD/DAT3	8	DAT1
2	CMD	9	DAT2
3	Vss1	10	WP Pin
4	VDD	11	CD Pin
5	CLK		
6	Vss2		
7	DAT0		

Without card: CD —○— CD/WP com, WP —○— CD/WP com

inserted card(unlock): CD —○— CD/WP com, WP —○— CD/WP com

inserted card(lock): CD —○— CD/WP com, WP —○— CD/WP com

GENERAL	TOLERANCE	DWG.NO.	TW76-AP401-00	PART.NO.	TW76-AP401-**	DRAWN	L.M.J 2015.11.19	UNIT	mm	SCALE	1:1
x.±0.50	x. °±5 °	REV.	A	TITLE	SD Push H4.25 Conn.	CHECKED		东莞市欧联电子科技有限公司 DONGGUAN OLN ELECTRONICS TECHNOLOGY CO., LTD.			
.x±0.25	.x °±2 °	SIZE	A4	SHEET	1 OF 2	APPROVED					
.xx±0.15	.xx ±1 °	A4									