
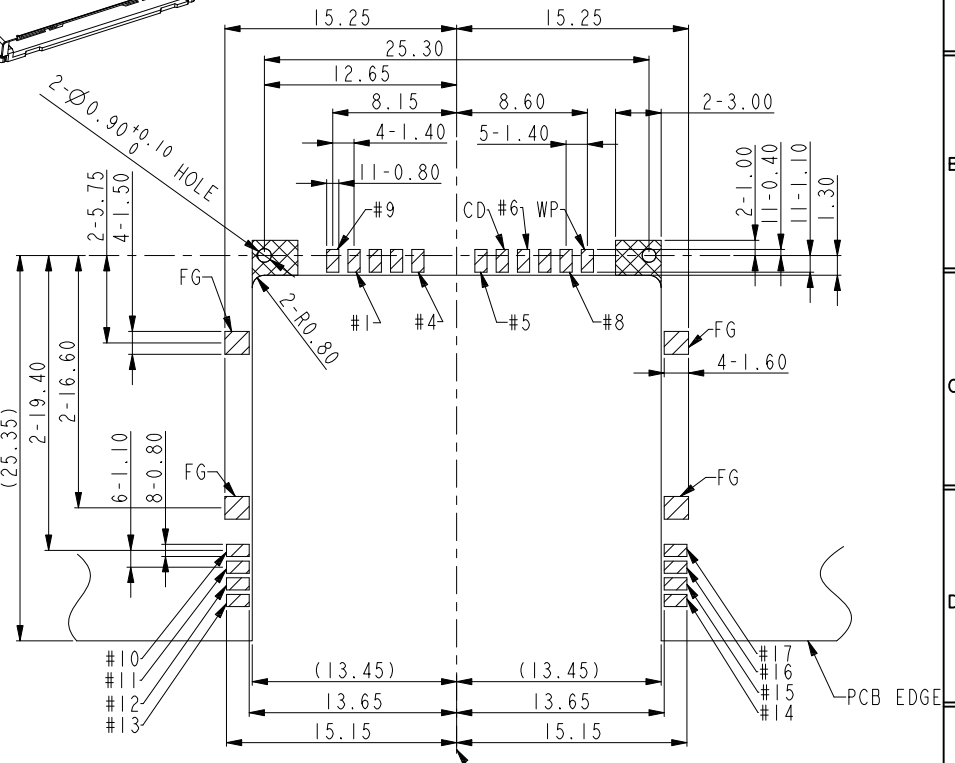


- NOTES :
- MATERIAL :
 - HOUSING:HEAT RESISTANCE POLYMER, UL94 V-0, BLACK COLOR.
 - SHELL:STAINLESS STEEL.
 - CONTACT:COPPER ALLOY.
 - FINISH :
 - CONTACT: GOLD PLATING ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL AREA. 50u" MIN NICKEL PLATING OVERALL.
 - SHELL: 30U" MIN SOLDERABLE NICKEL PLATED OVER ALL.
 - ELECTRICAL CHARACTERISTICS:
 - OPERATING VOLTAGE : 100V AC(rms)/DC.
 - CURRENT RATING : 0.5 A.
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - CONTACT RESISTANCE: 100 m OHMS MAX.
 - INSULATION RESISTANCE: 1000M OHMS MIN. AT 250VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE:500 VAC/1MINUTE.

PART.NO.: TW258-AN401-**-**


08: 功能区镀金10", 锡鍍Gold Flash
 09: 功能区镀金30", 锡鍍Gold Flash
 10: 功能区镀金50", 锡鍍Gold Flash
 11: 功能区镀金150", 锡鍍Gold Flash
 12: 功能区镀金300", 锡鍍Gold Flash

PIN No.	FUNCTION	FUNCTION		
		SD MODE	UHS II MODE	MMC MODE
No. 1	#9	DAT2	-	-
No. 2	#1	CD/DAT3	-	RSV
No. 3	#2	CMD	-	CMD
No. 4	#3	-	VSS1	VSS1
No. 5	#4	VDD	VDD1	VDD
No. 6	#5	CLK	-	CLK
No. 7	#6	-	VSS2	VSS2
No. 8	CD	CARD DETECT		
No. 9	#7	DAT0	RCLK+	DAT
No. 10	#8	DAT1	RCLK-	-
No. 11	WP	WRITE PROTECT		
No. 12	#10	-	VSS3	-
No. 13	#11	-	D0+	-
No. 14	#12	-	D0-	-
No. 15	#13	-	VSS4	-
No. 16	#14	-	VDD2	-
No. 17	#15	-	D1-	-
No. 18	#16	-	D1+	-
No. 19	#17	-	VSS5	-

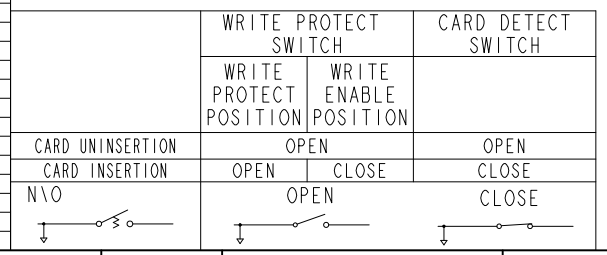

▨ : PAD AREA
 □ : PCB EDGE
 ▩ : NO PART AREA

RECOMMENDED P.C. BOARD LAYOUT (TOP VIEW)
 TOLERANCE UNLESS OTHERWISE SPEC ±0.05

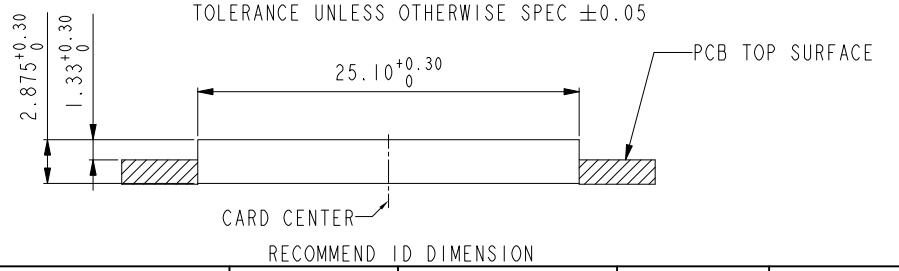


GENERAL TOLERANCE	TOLERANCE	DWG.NO.	TW258-AN401-00	PART.NO.	TW258-AN401-**-**	DRAWN	L.M.J 2022.08.27	UNIT	mm	SCALE	1:1
x.±0.50	x. °± 5°	REV.	X1	TITLE	SD6.0 No Push反向沉板1.40	CHECKED		东莞市欧联电子科技有限公司 DONGGUAN OLN ELECTRONICS TECHNOLOGY CO., LTD.			
.x±0.25	.x °± 2°	SIZE	A4	SHEET	1/2	APPROVED					
.xx±0.15	.xx °± 1°										

东莞市欧联电子科技有限公司


包装作业规范

包装作业图示及说明 (PACKING OPERATION DIAGRAM & INSTRUCTION)



- 一.
- 1) 将成品一一放入REEL包装盘内,依同一方向放入.
 - 2) 包装时,如图所示.
 - 3) 一个REEL包装盘放置410个成品.

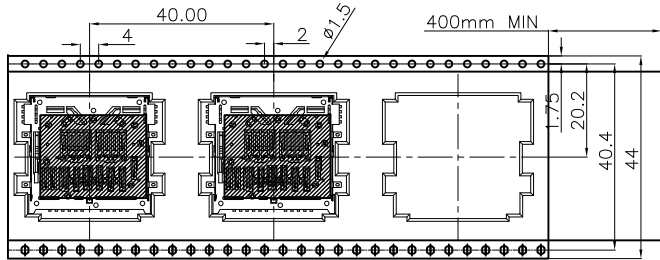

- 二.
- 1) 装盘前先把前面空20pcs产品,然后再开始装盘,尾端也需空10pcs产品,上带加长400mm MIN.
 - 2) 装满成品的REEL包装盘如下图所示.

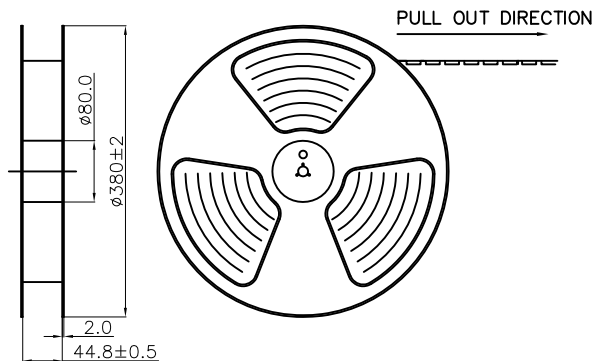

- 三.
- 1) 每箱装6盘REEL包装盘.
 - 2) 每箱放置2460PCS的成品.

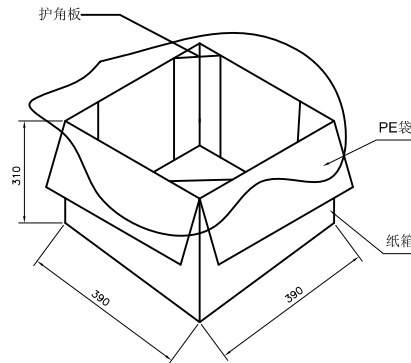

- 四.
- 1) 用TAPE将纸箱封实.

ITEM NO:	PCS
Q.TY.:	KGS
G.W.:	KGS
N.W.:	cm
MEAS:	

C/NO: MADE IN CHINA	

備註 (REMARK)

1. 若有未装满之零数箱,必须以缓冲材塞满.

GENERAL TOLERANCE	DWG.NO.	TW258-AN401-00	PART.NO.	TW258-AN401-**	DRAWN	L.M.J 2022.08.27
x.±0.50	REV.	X1	TITLE	SD6.0 No Push反向沉板1.40	CHECKED	
.x±0.25	SIZE	A4	SHEET	2/2	APPROVED	
.xx±0.15						